

Overview

Retrofit Interior (RI) replaces existing relay panel electronics and relays with a single back plate mounted assembly. Installation retains the original line voltage wire, conduit, and enclosure reducing labor as well as material cost. RI may be scheduled from any BACnet BAS and is compatible with most low voltage switches, occupancy sensors, and light level sensors. Retrofit Interior 32 (RI32) may be specified with 16, 24, or 32 Lighting Tough Relays (LTR) in addition to several special options.

Features

- BTL Listed, UL Listed
- Retains line voltage wire, conduit, and enclosure
- Dimming (DLH / Presets)
- BACnet MS/TP communication to BAS network
- CANbus for Satellite and Capacitive Touch Stations (CTS)
- Install in less than 4 hours
- Available options:
 - Load status on all relays
 - 347VAC Transformer
 - UL924 Emergency Bypass
 - Top, bottom, or center mount low voltage compartment

General Specifications

Construction: 16ga steel with galvanneal / powder coat finish

Dimensions:

Top / Bottom Low Voltage Compartment:

- 22.48"(571mm)H x 12.00"(305mm)W x 3.38"(86mm)D
- Factory mounted transformer increases overall width to 15.56"(395mm)

Center Low Voltage Compartment:

- 20.25"(514mm)H x 12.00"(305mm)W x 5.25"(133mm)D

Approximate Weight: 18lbs(8kg)

Mounting: Standard (1.00"(25mm) washer head self-tapping) Concrete / Masonry (2.25"(51mm) masonry screws with flat washer)

Operating Environment: 32-125°F (0-50°C), 20-95%RH, non-condensing

Certifications

BTL Listed, UL Listed, UL508A Open, US/Canada

Warranty

Five (5) year limited manufacturer warranty from date of shipment (extended warranty optional).

Firmware Specifications (Controller Board)

Platform: Aperio Open Control Platform

Time Clock: Real-time clock with BACnet time sync

Schedule: BACnet Schedule, Monday – Sunday, Holidays, and Exceptions

Non-Volatile Memory: 16MB total, 2MB for trend data (15min trend requires 2K per day)

RAM: 2MB total, data stored in non-volatile memory upon power loss

Configuration: Tech Kit 2.0 (see data sheet for details)

Configuration Connection: Micro-B USB or Bluetooth Wireless

Low Voltage Specifications (Controller Board)

Power In: 24VAC +/-10%, 30VA, 50-60 Hz

Auxiliary Out: 24VAC, 800mA (devices with full wave rectified power supply only)

Universal Input (UI) and CANbus Network Power Out: 24VDC, 200mA total


Universal Input: 24 two-wire inputs

Universal Input Software Configuration:

Digital Input (DI)

Analog Input (AI): 0-5VDC, 0-10VDC, or 4-20mA

Universal Input Wire Requirement / Maximum Length: 18AWG (Solid or Stranded) / 500'(152m)

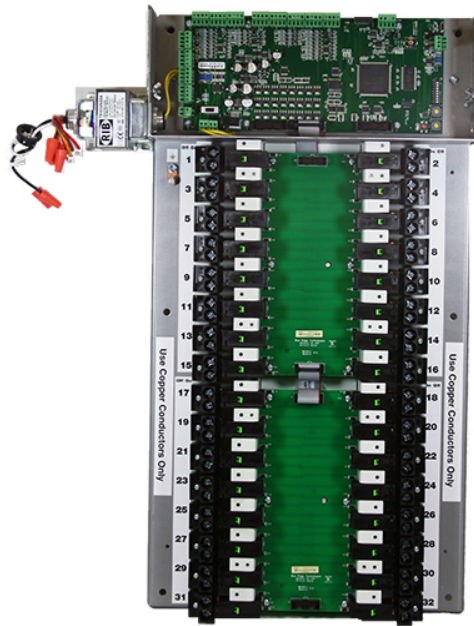

BAS Network Specifications

Protocol: BACnet MS/TP

Baud Rate: DIP switch selectable 9.6K, 19.2K, 38.4K, 76.8K, or 115.2K

Device Profile: BACnet Application Specific Controller (B-ASC)

Address Range: 1 – 99 selectable with rotary dials

Unit Load: 1/8 unit load

Topology: RS-485, half duplex, daisy chain wiring

Wire Requirement / Maximum Length: CL3P, 22AWG, 2 conductor, shielded, low cap / 4000'(1216m)

Points: See *PIC Statement*

CANbus Specifications

Compatible with CTS and Satellite devices. See data sheet for details.

Transformer Specifications

Type: 40VA Inherently Limited UL Listed

Primary: Multi Tap 120, 208, 240, or 277VAC +/-10%, 40VA, 50-60 Hz

Secondary: 24VAC +/-10% Inherently Limited

Wire Requirement: 18AWG Minimum (Solid or Stranded)

The transformer is factory installed in the Exclusion Frame. However, a knockout bushing is included to facilitate remote mounting applications.

LTR Specifications

Type:

UL Listed

SPST latching with manual override lever

Electrically operated mechanically held, pulse driven

Short Circuit Current Rating (SCCR) 40,000A @ 277 VAC

Maximum Ratings: Tungsten 20A @ 347VAC / Magnetic Ballast 30A @ 347VAC / Electronic Ballast 16A @ 347VAC / Resistive 20A @ 347VAC / 1.5HP @ 120VAC

Load Terminal: Universal screw terminal, box type clamp


Terminal Capacity (per side): (2) 14-10AWG or (1) 8AWG (Solid or Stranded copper wire)

Retrofit Interior 32

www.BRTint.com : 800-241-9173 Blue Ridge Technologies® © 2016 Blue Ridge Technologies International, LLC All Rights Reserved. RI32-DS-V14.05

Data Sheet : Catalog Page 33

System Architecture

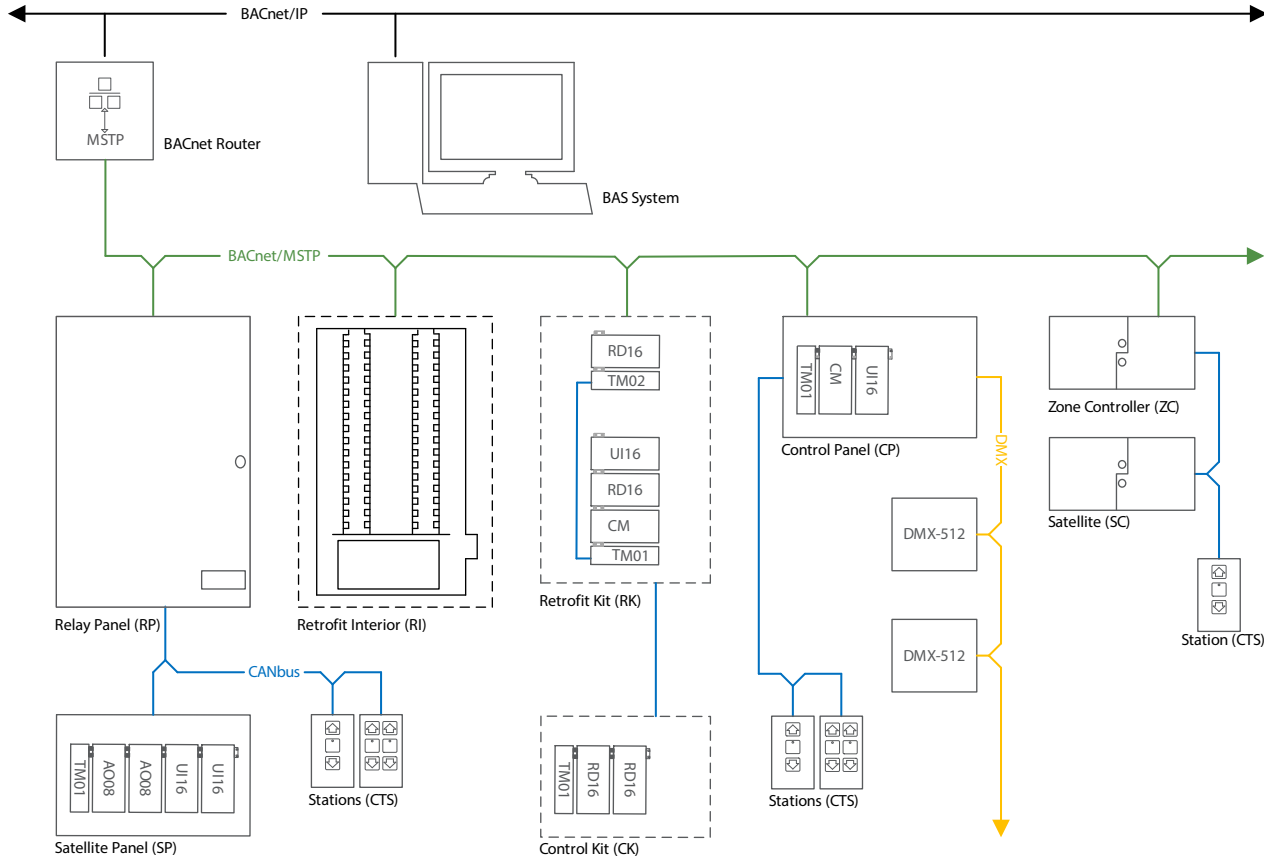

Ordering Information

R1XX32 - XX - X - XX - XX

Controller Options

- XX = DS Dimming Standard Controller
- DL Dimming Controller with Load Status on all relays
- DX Dimming Controller with Load Status and UL924 on all relays

Quantity of Relays Installed

- XX = 16 16 Relays Installed
- 24 24 Relays Installed
- 32 32 Relays Installed

Power Options

- X = 0 120 / 208 / 240 / 277VAC Transformer
- 1 347VAC Transformer

Special Options

- XX = 00 None
- X1 UL924 Emergency Bypass (Relays 17-32 only)

Low Voltage Compartment (Controller Board) Position

- XX = T0 Top of Interior
- B0 Bottom of Interior
- C0 Center of Interior