
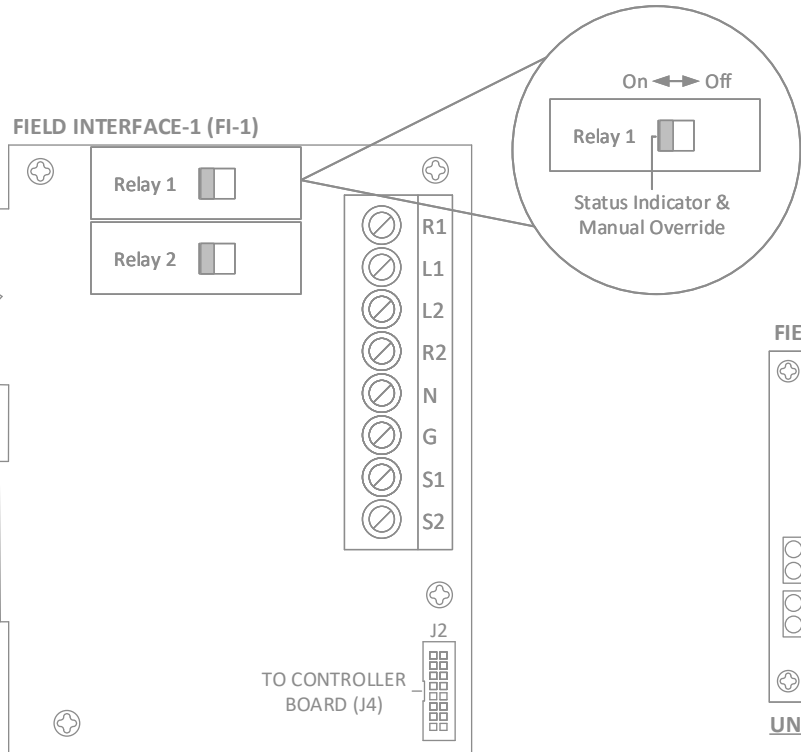


DIMENSIONS: 5.063"H x 10.00"W x 2.50"D

MOUNTING: 4" or 4 11/16" Junction Box

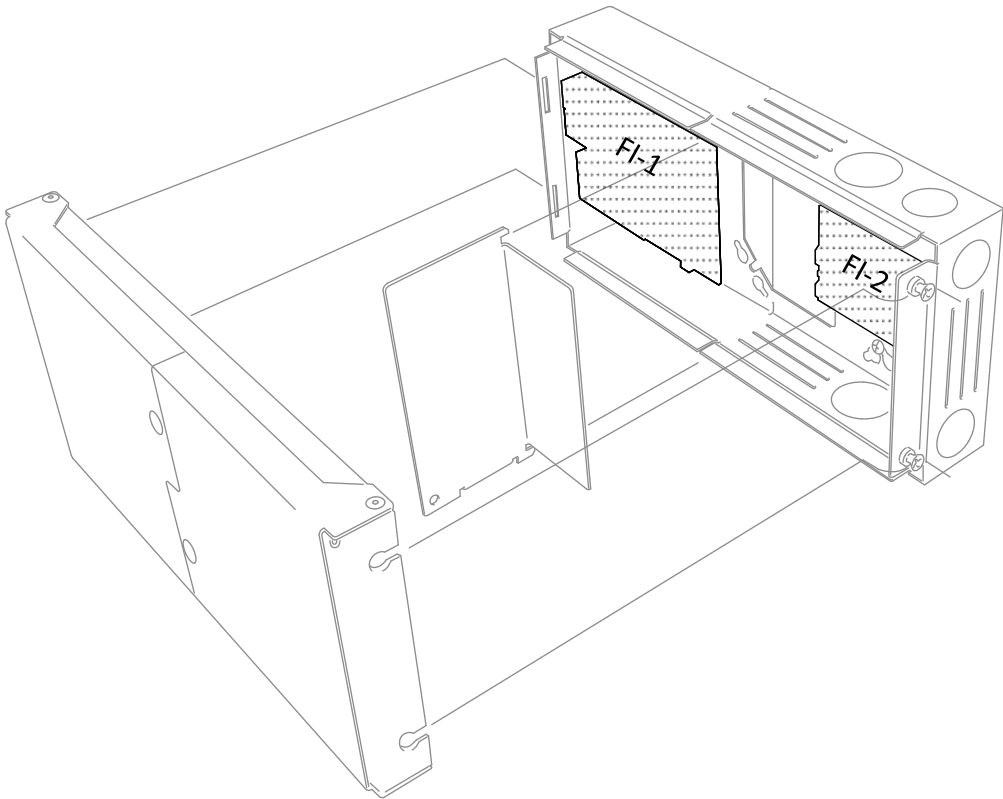

**FIELD INTERFACE (FI-1)**

POWER: 120-277 VAC, 50/60HZ, +/-10%  
Single Phase 20A Circuit

**RELAY OUTPUTS (RO)**


LOAD RATINGS: Magnetic Bal. 20A at 277 VAC  
Electronic Bal. 16A at 277 VAC  
Tungsten 20A at 277 VAC  
Resistive 20A at 347 VAC  
1.5HP at 120 VAC  
ZC Maximum Load Rating: 20A per circuit

WIRE: 14-10 AWG Solid or Stranded, Copper

**TORQUE SPECIFICATION**

SCREW TERMINALS: 5in-lbs

**FIELD INTERFACE-2 (FI-2)**

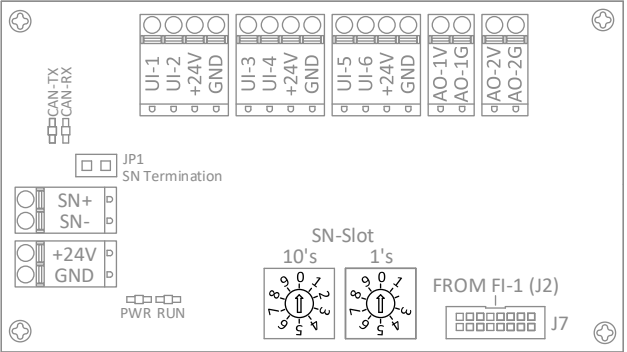

**UNIVERSAL INPUTS (UI)**

POWER: 24 VDC, 200mA shared between UI's & Station Network  
GENERAL WIRE: CL3P-22/2, 1000' Max  
SENSOR WIRE: CL3P-18/3, 1000' Max

**ANALOG OUTPUTS (AO)**

POWER: 0-10 VDC, Sink 100mA or Source 5mA Each  
WIRE: CL3P-18/2, 1000' Max

**CANbus NETWORK-SN**


TOPOLOGY: Daisy Chain Only  
COMM WIRE: CL3P-22/2-LC, 1000' Max  
POWER WIRE: CL3P-22/2, 1000' Max

**TERMINATION-SN**

(Un-terminated) (Terminated)



NOTE: For wire requirements see Cabling Data Sheet.

Engineering Standards SCDTL_01.40			
Satellite Details, 2 Circuit			
Rev: 4	Type:	Date: 01-22-18	Job #:
 UNIFIED LIGHTING CONTROL			Engineered: JAH
			Drawn: JAH
			Checked: CLO
			Page: 1 of 1